


# TORQUE SPECIFICATIONS

| NO. | DESCRIPTION           | N-m         | ft-lb       |
|-----|-----------------------|-------------|-------------|
| 1   | Banjo Bolt M14 X 1.50 | 16.5 - 21.7 | 12.2 - 16.0 |
| 2   | Banjo Bolt M16 X 1.50 | 21.8 - 28.3 | 16.1 - 20.9 |
| 3   | AN-06 to 9/16-18 ORB  | 16.9 - 22.0 | 12.5 - 16.2 |
| 4   | AN-08 to 3/4-16 ORB   | 30.5 - 39.5 | 22.5 - 29.2 |

**\* Do not lubricate bolt.** Torque to lighter specification and check for leakage, increasing torque only to stop leakage without exceeding maximum specification. Replace crush washers whenever re-assembly is required.

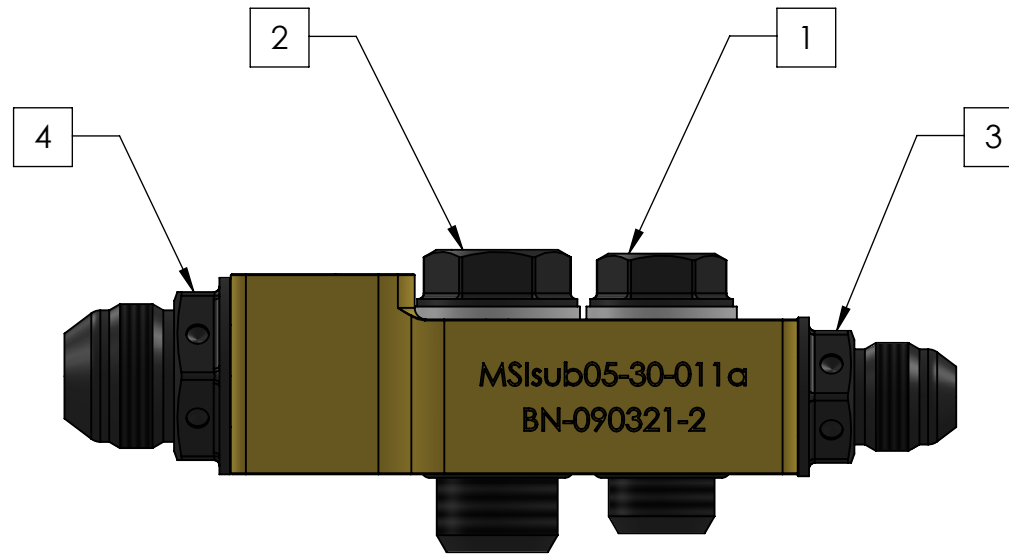

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MSI (Moore-Sport INC). ANY REPRODUCTION IN PART OR AS A WHOLE IS STRICTLY PROHIBITED.



2015 PS Hyd. Line AN conversion Kit (w/ fittings)

|             |                 |                |                        |          |            |
|-------------|-----------------|----------------|------------------------|----------|------------|
| CAR MODEL   | Subaru 2015     | CONFIGURATION: | ASSEMBLY:              | REV      | 2022-04-14 |
| APPLICATION | Motorsport ONLY | <b>Default</b> | <b>MSIsub05-30-011</b> | <b>1</b> | 121.09     |